

D/V-8-232 SYSTEM OVERVIEW

HOST SYSTEM

FIRE ALARM
 CARD ACCESS
 PANIC BUTTONS
 PROCESS CONTROLS EQUIPMENT
 NURSE CALL




Pagers



Serial Port

Telco Line In Telco Line Out

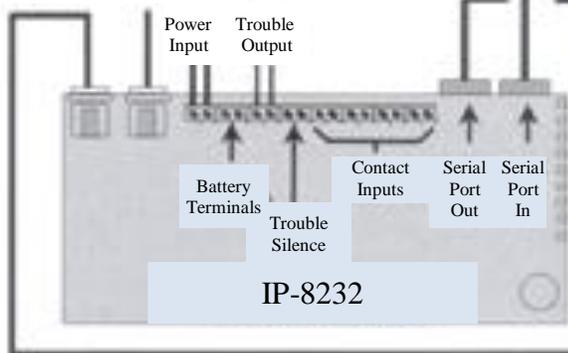

Direct Connection To In-House or Customer Owned Paging System OR Telephone Connection Paging Messaging Service



D/V-8-232 SPECIFICATIONS:

Dimensions (L X W X H)	10" x 4.5" x 2"
Power Supply:	Plug in 12 volt AC adapter supplied
Programming Software:	Pager Interface Programming Software
Direct Connect Paging Protocol	TAP, PET
Direct Connect Paging Settings:	1200 Baud, E,7,1
Contact Inputs:	8 Optically Isolated Dry Contact or Wetted Voltage
Message Size:	Max.80 Characters/condition/input
Incoming Data Type:	RS232, ASCII Characters
Incoming Data Comm. Settings:	RS232, TAP, COMP2
Telephone Line Connector:	RJ11
Dial Up Number:	Up to 25 Characters (programmable)
Dial Method:	DTMF
System Com. Settings:	N,7,1 or E,7,1 or N,8,1 (programmable), 300, 600, 1200, 2400 baud
Messaging System Protocols:	TAP 1.8



1-800-992-1000 or www.iplp.com

1-561-844-7900